Installation Guide

KDI 8178, 1U 17" monitor keyboard drawer

DC Power Input —— Figure 11-2. Identifying IP KVM rear panel components

1. Connect the included power adapter to IP KVM and switch on. A beep sounds and "BANK No." LED indicated the current bank status.
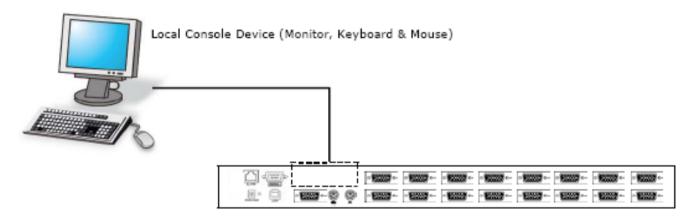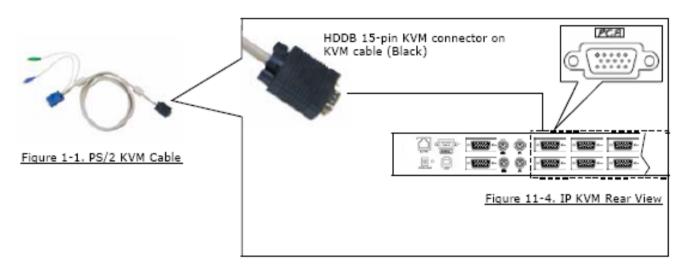

Local Console Device (Monitor, Keyboard & Mouse)

Figure 11-3. IP KVM Rear View

2. Connect the Local Console of KVM to input device and Display Unit.

HDDB 15-pin KVM connector on KVM cable (Black)

PCA

Figure 1-1. PS/2 KVM Cable

Figure 11-4. IP KVM Rear View

3. Connect the IP KVM to your servers up to 16 servers (for KDI 8178 only, serves up to 8 ports).